

Instruction for changing settings of BS180/BS280/BS350

System: window 7 64 bit, Windows 10 64 bit, window 7 is recommended.

Step 1: download driver and setting software (“run as an administrator”)


Drive: [CH341 PL2303Driver](#)

Setting tool: [BS180 BS280 BS350 用户设置工具安装包](#)

Step 2: unzip it to current folder



Step 3: Double-click the driver CH341SER to install it



① Click button “install”




② Confirm it when see pop-up window for successful installation




③ Close the installation window




④ Click "this program is installed correctly"

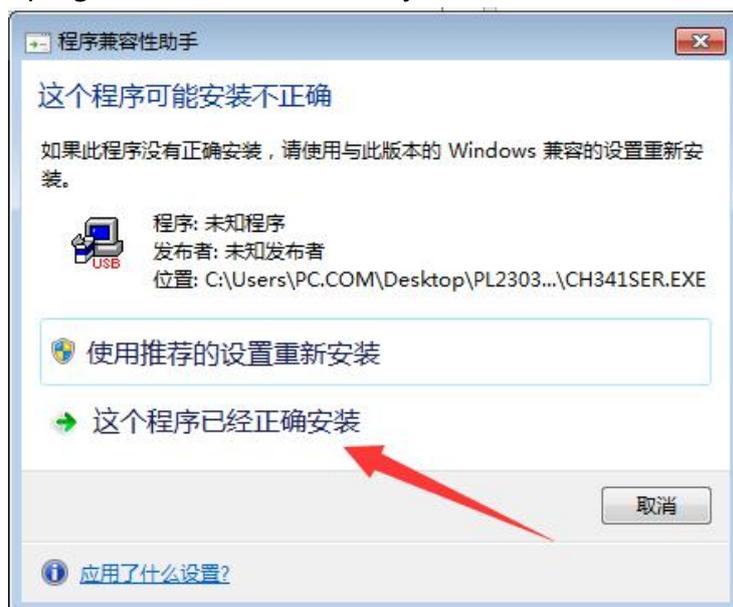


Step 4: Double-click to install the drive as below




① Click "Next"

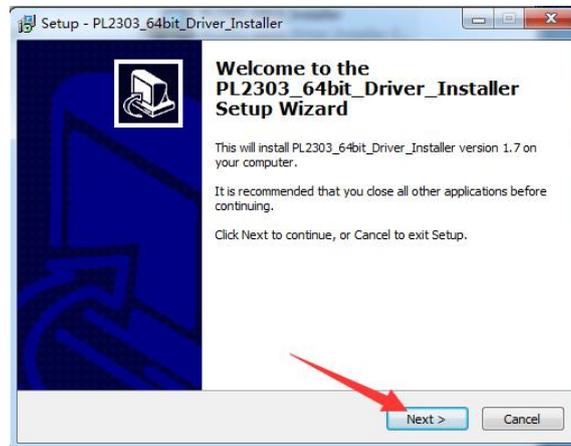


② Click "Install"

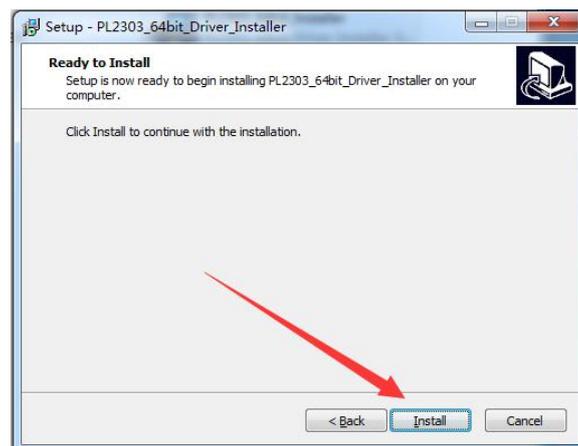

③ Click "Continue"

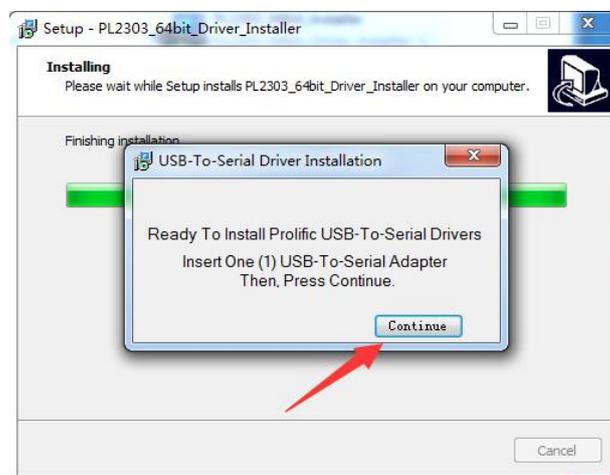

- ④ Click "Finish" on pop-up window of restart the computer

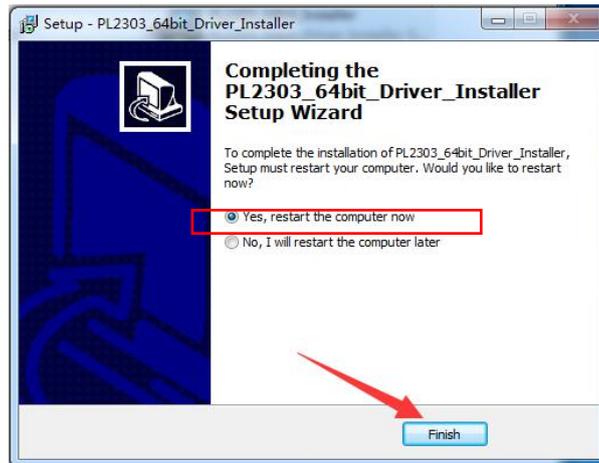

Step 5: install setting tool



- ① Click "run"




- ② Click "next"




- ③ Choose the path where to keep the setting tool




④ Click "Next"

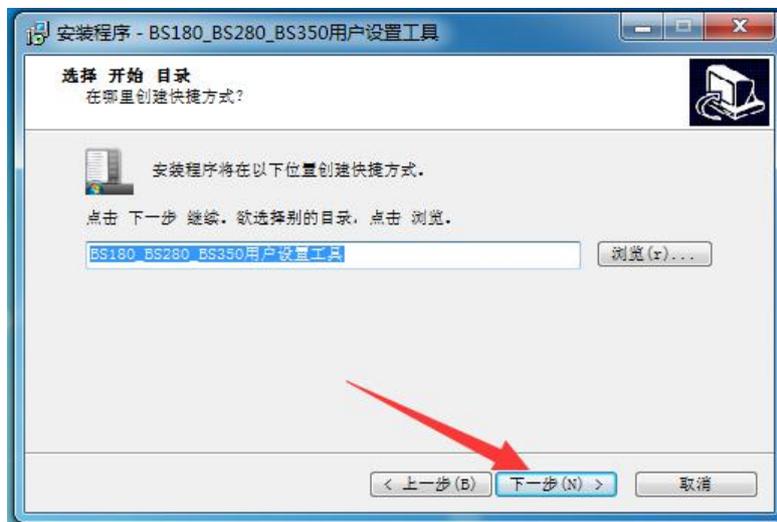


⑤ Choose to install desktop shortcut

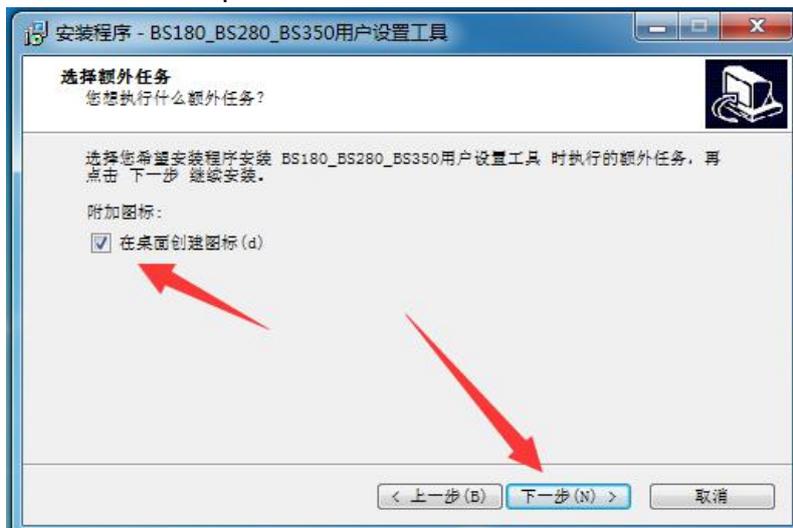

⑥ Click "install"

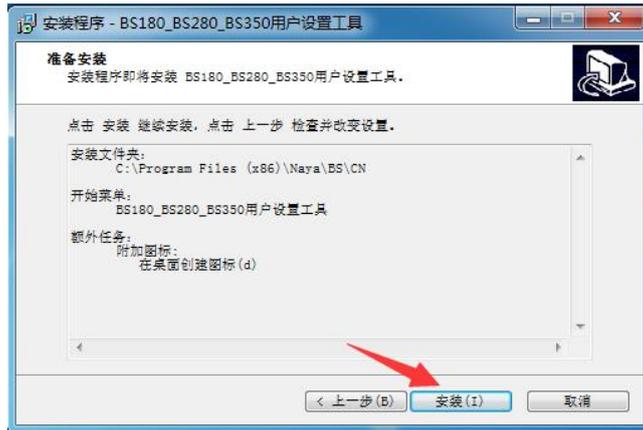


⑦ Click "finish"

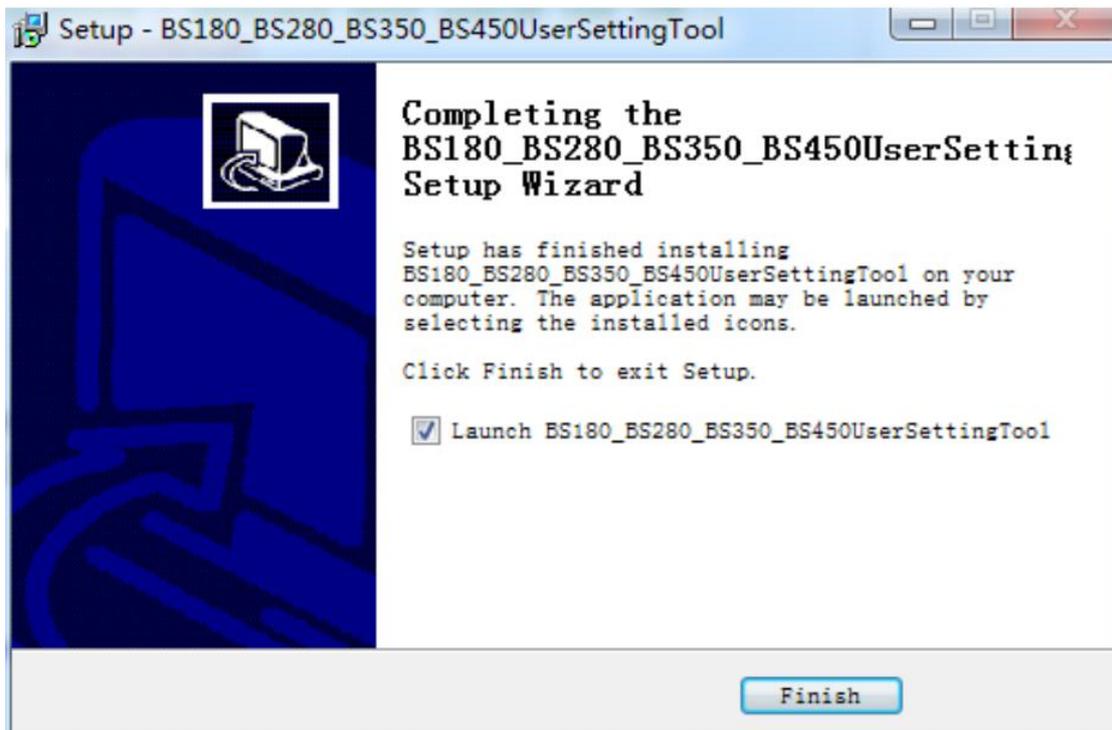


⑧ Setting tool shortcut will be on desk of computer as below




Step 6: Connect the base station BS350(which is turned off) to computer as below

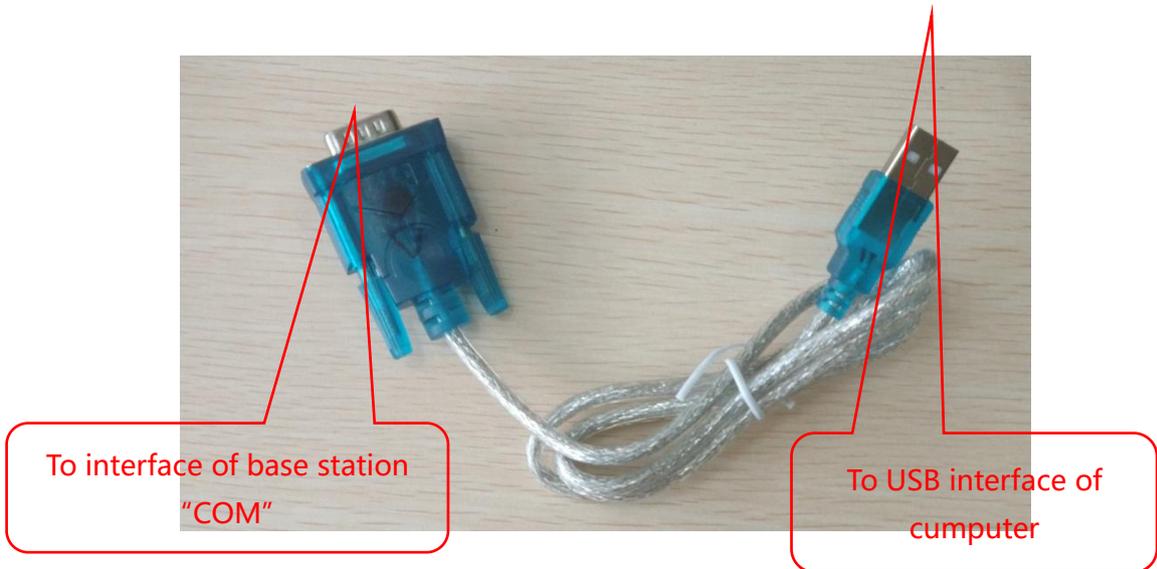


After connecting to computer, the port number will be found on "Device manager" of computer

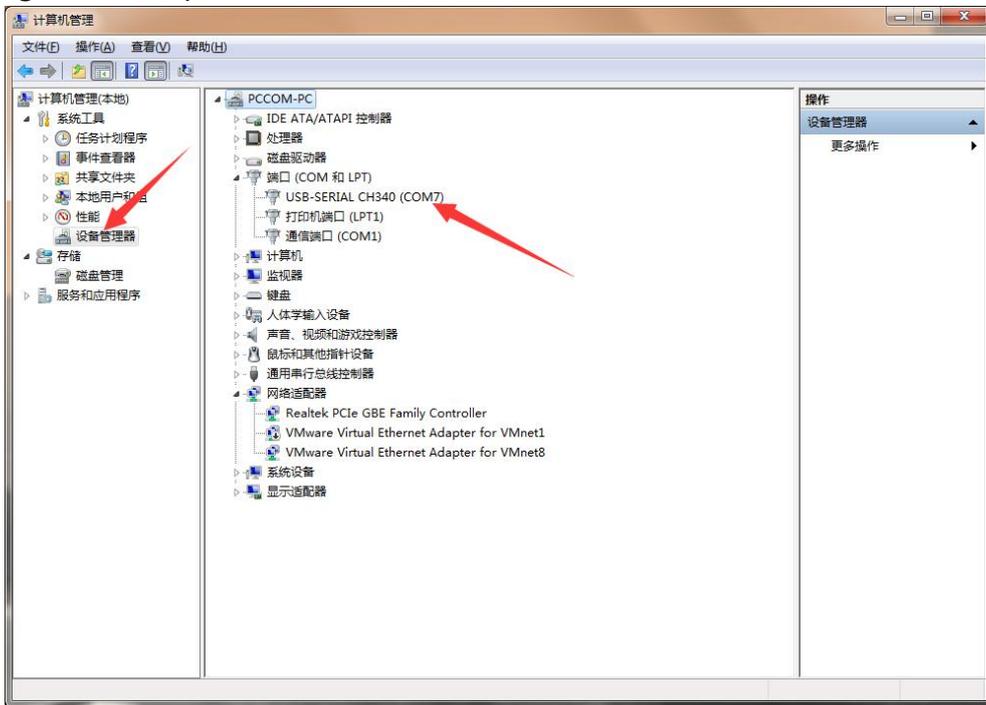


Step 7: Open the setting software as below

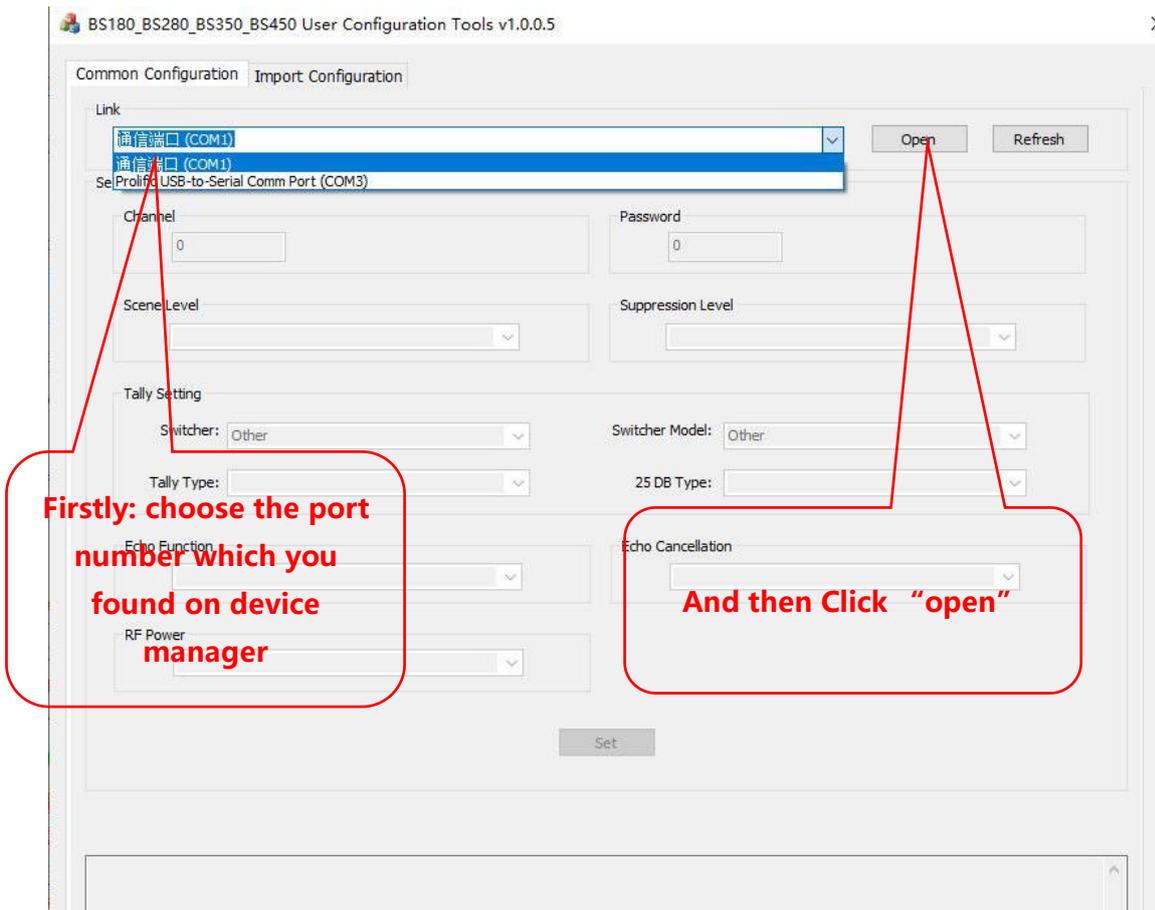

Step 8: Power on base station and turn it on, after recognition the base station computer and base station will be connected automatically, and then you will see "get configuration success" as below:

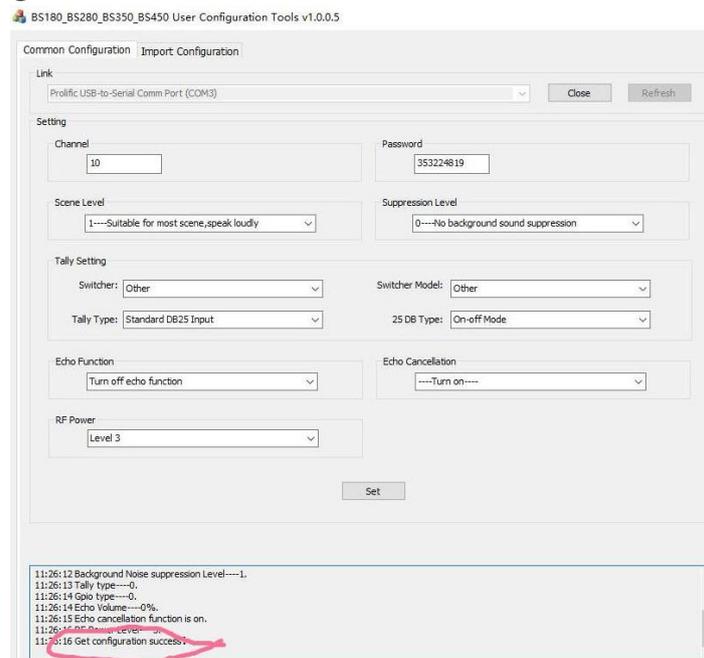

Step 9: After successful connection you can change the setting, and click “set” as below:

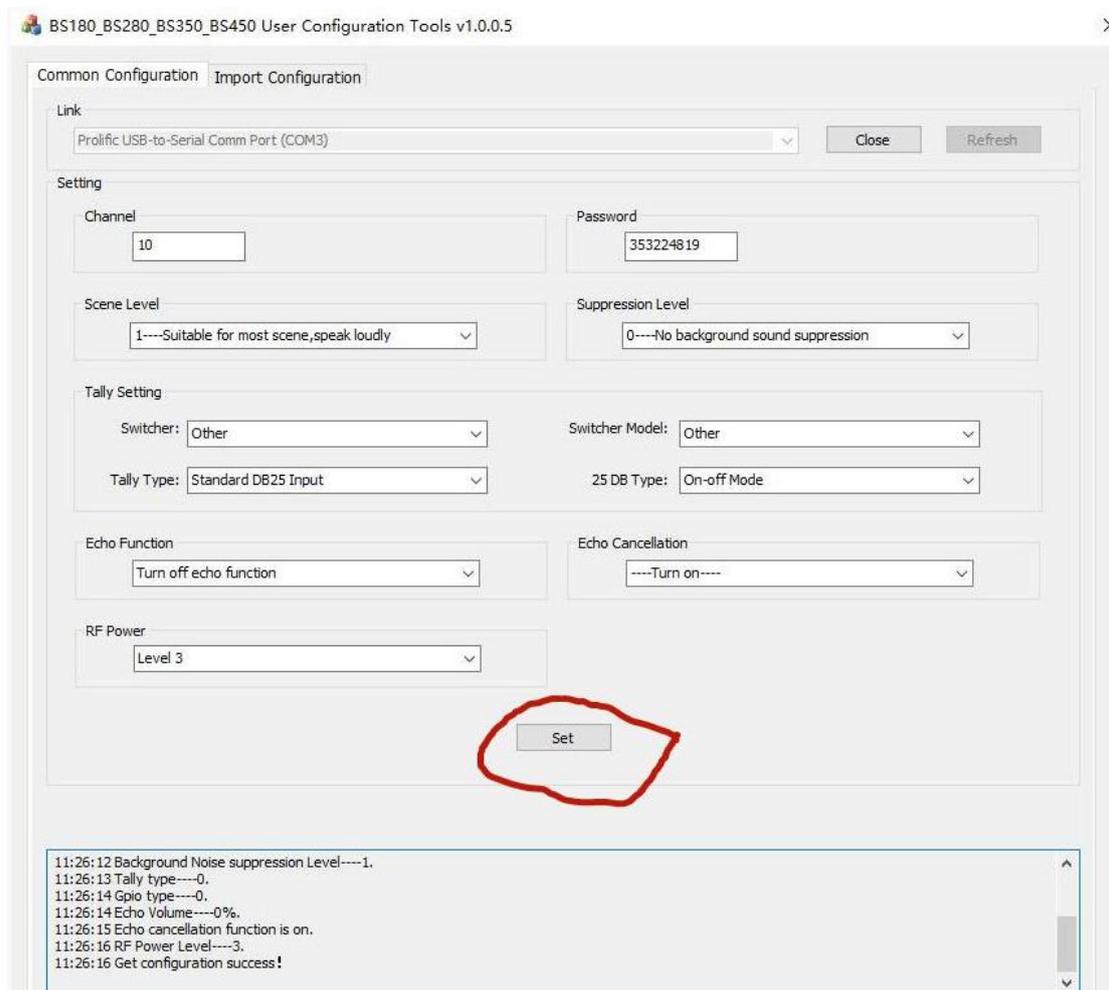

Remarks:

- ① Channels optional from 55-111, channel of base station, all beltpacks and Tally should be same.
- ② Password of base station, all beltpacks and Tally should be same.
- ③ Scene level(background sound level) default “1” , for most scene.
- ④ Suppression level default “2” .
- ⑤ Tally: you can choose Switcher and Switcher model according to the actual switcher that will be used.
- ⑥ Echo function: no supported by BS180.
- ⑦ Echo cancellation: no supported by BS180.
- ⑧ RF power: changing is not recommended.

You need to install the drivers first time, and then when you will change the settings from 2-nd time, you can start from 6th setp of the struction.

Common questions:

1、 Port number won' t be found on Device manager after connecting base station and computer with the cable.

Solution: 1) Bad USB interface of computer, so you can try another USB interface.

2) Computer had not been restarted after installing the driver.

3) Incorrect cable was used.

2、 Driver installation is not successful

Solution: system 32 bit should be changed to 64 bit W7 or W10.

3、 Port number on device manager with exclamation mark.

Solution: 1) Built-in driver on computer was used, W 10 usually with this problem, so its better to change to W7.

4、 When setting tool is opened, failed to open the port.

Solution: the port is used by other software, so this software should be closed.

5、 When setting tool is opened, click "set" but not successfully.

Solution: 1) Restart the base station, after seeing successful connecting change the settings.

2) Incorrect port selected, so you need to choose the port once again.